


INSTALLATION FOR PART NO. 1219 2009 DODGE 1500 RAM W/TOW HOOKS GRILLGUARD

- 8 - 1/2 X 1 1/2 bolts
- 2 - 1/2 x 2 bolts G8
- 4 - 1/2 x 2 1/2 bolts G8
- 14 - 1/2 nuts
- 26 - 1/2 flat washers
- 14 - 1/2 lock washers



- Step 1:** Remove tow hook factory bolts and replace them with 2 - 1/2 x 2 1/2 G8, on the back of the tow hook arm remove factory bolt and re-use bolt.
- Step 2 :** Place P bracket and R bracket under the tow hooks, then place bottom support bracket under the P and R bracket and also to the back support bolt as shown.
- Step 3 :** Place top bracket under the plastic and bolt on to the metal bumper and also bolt bracket to the top of the P and R bracket as shown.
- Step 4 :** Attach grill guard to the P and R bracket. They should mount to the inside of the upright.
- Step 5 :** Check alignment and tighten bolts. You may need to periodically retighten the bolts.

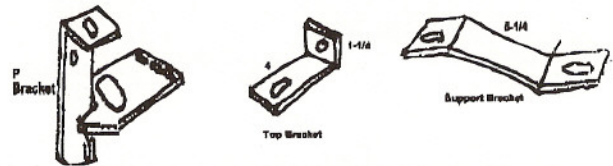